


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - ALL RIGHTS RESERVED.

LOG	DIST	REVISIONS			
#	LR	DESCRIPTION	DATE	DRW	APPD
CF	71				
	C	PER ECR-06-027777	28NOV06	JS	JH

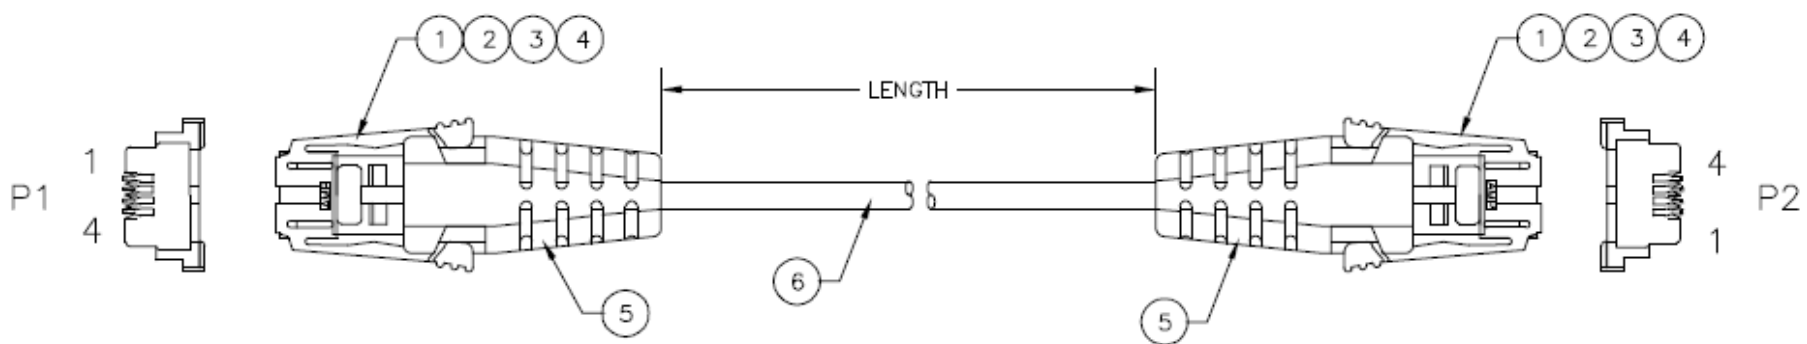

P1	WIRING	P2
1	BLACK AWG 26	1
2	GREEN AWG 26	2
3	RED AWG 26	3
4	WHITE AWG 26	4
5	SPIRAL SHIELD	5

LENGTH	(4ft)	(8ft)	(16ft)
	48.74±1.97	97.96±1.97	193.93±1.97
P/N	CAB4R	CAB8R	CAB16R

16.3	8.3	4.2	FT	CABLE, UL20276 26 AWG, BLACK.	6	
2	2	2	PC	4 SDL RND PLUG BOOT, BLACK.	5	
2	2	2	PC	BOTTOM SHIELD	4	
2	2	2	PC	TOP SHIELD	3	
2	2	2	PC	FERRULE	2	
2	2	2	PC	AMP 4Pin SDI Plug, Contact: Gold Plated 50U".	1	
-3	-2	-1	U/M	PART NO.	DESCRIPTION	ITEM

NOTES:

1. THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 100M OHMS AT 20°C, 500VDC.
2. THE WIRE SHALL WITHSTAND DC 500V BETWEEN CONDUCTORS AND EARTH WIRE FOR ONE MINUTE.
3. THERE SHALL NOT BE DISCONTINUITY.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRW	11SEP06	<b>Micro Computer Control</b>	
		CHK	12SEP06		
		APPD	12SEP06	I2C Bus Cable Assembly (CAB4/8/16R)	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		SIZE	
		0 PLC	±-	DRAWING NO	
		1 PLC	±-	RESTRICTED TO	
		2 PLC	±-	-	
		3 PLC	±-	-	
		4 PLC	±-	-	
MATERIAL		FINISH		SCALE	
-		-		N.T.S.	
		CUSTOMER DRAWING		SHEET 1 of 1	
				REV C	